

## Installation Instructions

### Included in Package:

- Tuck (TK) fixture
- DC power supply (not included in adder kits)
- 30" interconnect cord (included in adder kits only)
- 2x Adhesive cord managers

### Magnet Mount Application

**CAUTION: Magnetic field present in magnet mount fixture.**

1. Fixture comes with magnet/screw mounts pre-attached to the fixture. To attach directly to a metal surface, locate the fixture to the desired position and set in place. (Fig. 1)
2. Plug DC cord to the on/off/dimmer end of the fixture and route to the power supply. (Fig. 2)
3. Plug power supply into 120V, 60Hz grounded outlet.

### Screw Mount Application





1. Remove magnet/screw mounts by carefully prying up one edge of the mount.
2. Using the included screws, screw bracket clip to shelf in desired location (Fig. 3) evenly spaced across the fixture and centered under shelf (Fig. 4).
3. Raise fixture to clip, aligning the channel on the back of the fixture with clip and snap into place (Figs 5 and 6).
4. Plug DC cord to the on/off/dimmer end of the fixture and route to the power supply. (Fig. 2)
5. Plug power supply into 120V, 60Hz grounded outlet.

### Installing the Cord Managers

Affix to clean, dry surface using firm, direct pressure for 3-5 seconds to achieve a good adhesion to mounting surface.

### Dimming the Fixture




Touch and hold your finger to the on/off/dimmer touch pad. The fixture will brighten and then dim. Release the touch pad when preferred level of brightness is obtained. Each time the fixture is turned on it will return to the level of brightness previously set. To reset the brightness to a different level, touch and hold the touch pad.

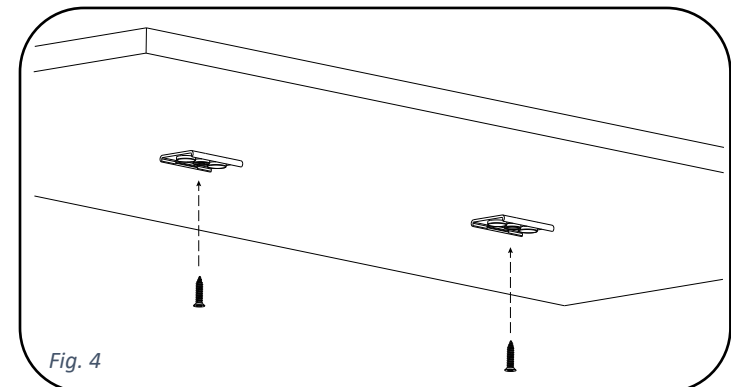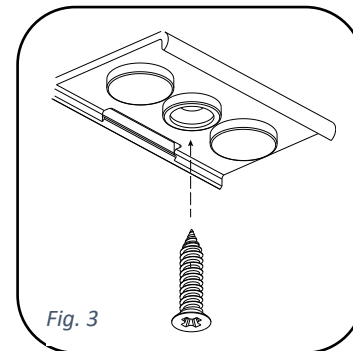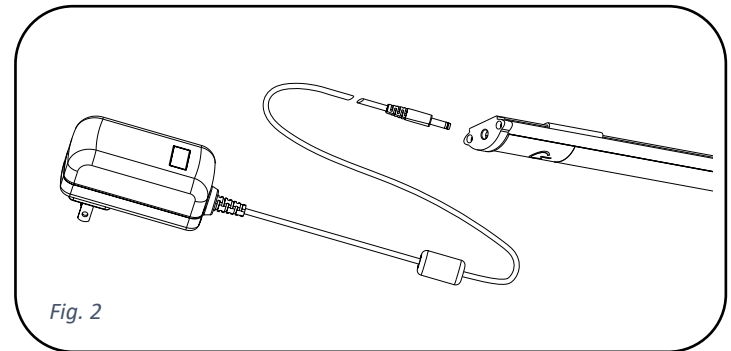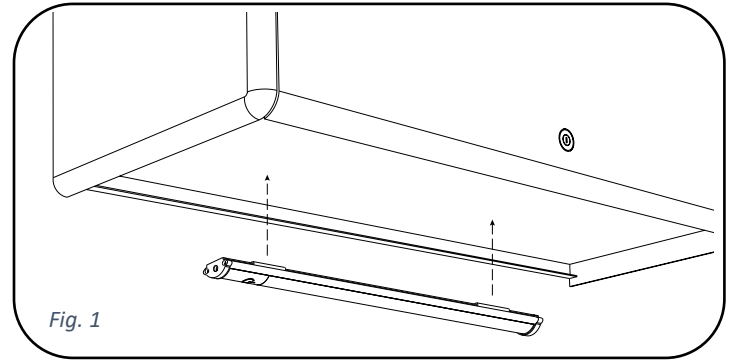

### Interconnecting Multiple Fixtures

1. Route the interconnect cord from one end of a fixture to the end of an adjacent fixture (Fig. 7). The maximum distance between the interconnected fixtures is 30", determined by the length of the interconnect cord provided, excluding the connectors.
2. Plug power supply into 120V, 60Hz grounded outlet.
3. Route the low power DC cord from power supply to the starter fixture.

**NOTE:** A 40-watt power supply is required when connecting multiple fixtures. All connected fixtures are controlled by the starter fixture. Do not kink or pinch cords while routing, which may damage the cord. Tuck can only be interconnected with the Tuck fixture manufactured by LightCorp. Cannot be interconnected with any other product family. Max 36 watts total connected load.

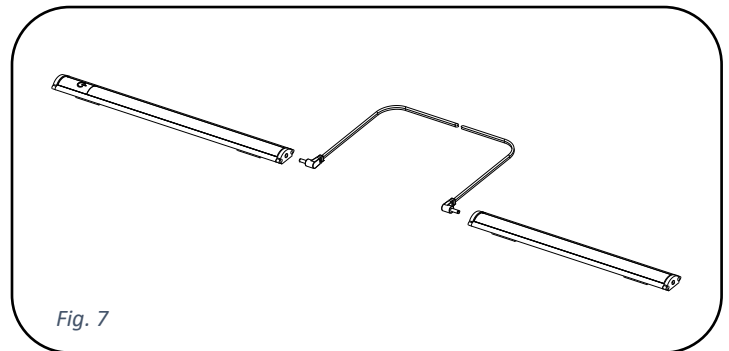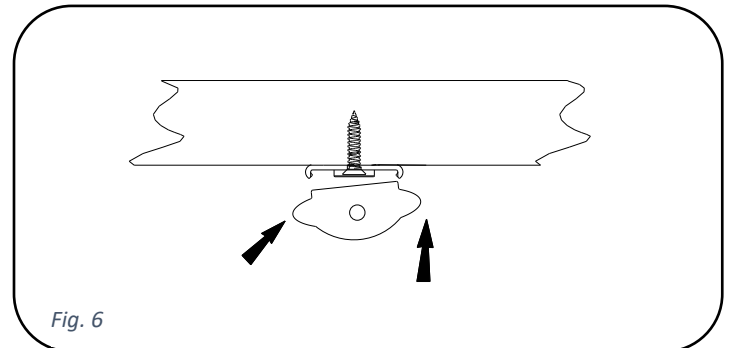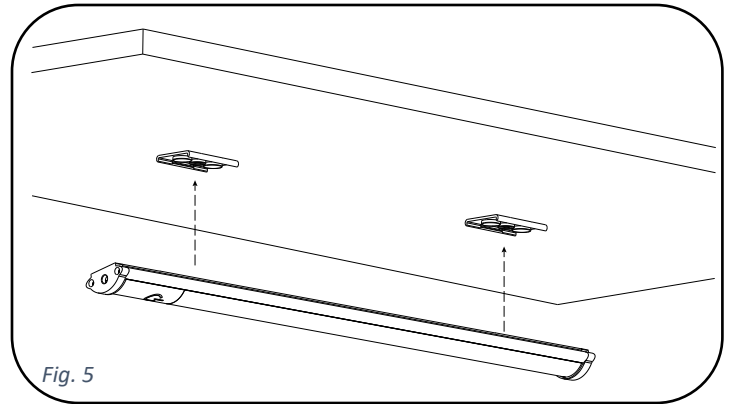

#### **FCC Compliance**

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. This Class A digital apparatus complies with CanCet appareil numérisé de la classe A est conforme à la norme NMB-003 du Canada.

Assemblies are not intended for industrial/commercial applications in Canada. (CSA 308 pg. 13 defines commercial/industrial as "factories, garages, construction sites")