

LIGHTCORP

# Tuck *Under Shelf Light*



### FEATURES:

- Interlinkable
- Master control
- Continuous dimming from 100%-15%
- Auto shut-off after 12 hours (± 15 mins.)

### SPECIFICATIONS:

ENERGY CONSUMPTION	see chart below
NUMBER OF LEDS	see chart below
LIGHT OUTPUT	see chart below
LED RATED LIFESPAN	> 43,800 hours
COLOR TEMPERATURE	3500K
COLOR RENDERING INDEX	82+
POWER SUPPLY	18W wall transformer with 9' black cord; 40W wall transformer with 10' cord
MATERIALITY	anodized aluminum and plastic
MOUNTING	magnets and screw mounts are integrated into the fixture body
CERTIFICATIONS	ETL listed: compliant to UL 153 & CSA C22.2 No. 250.4; FCC Part 15 Class B; TAA; UL 2108; CSA C22.2 No. 9
WARRANTY	5 years fixture; 1 year power supply


	# LEDS	PEAK FC	LUMENS	WATTAGE	SYSTEM WATTAGE
12" fixture	36	55	375	3.8	5.0
17" fixture	54	76	510	5.6	6.3
31" fixture	90	108	961	10.3	11.75
44" fixture	132	117	1313	14.3	16.19

### FINISH:



### DIMENSIONS:

	L	H	D
12" fixture	13.8"	.50"	1.18"
17" fixture	18.8"	.50"	1.18"
31" fixture	32.8"	.50"	1.18"
44" fixture	45.8"	.50"	1.18"

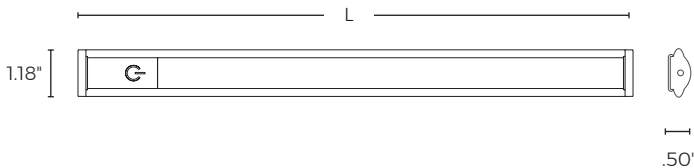

### SPECIFICATION NOTES:

- Stand alone fixtures include one light fixture, 18-watt power supply, magnet and screw mounts and two adhesive horizontal cord managers.
- Starter fixtures include one light fixture, 40-watt power supply, magnet and screw mounts and two adhesive horizontal cord managers.
- Adder fixtures include one light fixture, one 30" interconnect cord, magnet and screw mounts and two adhesive horizontal cord managers.
- Additional cord managers are available for purchase.

### SUSTAINABILITY NOTES:

- Made with fully-recyclable anodized aluminum and plastic. Please contact your local county or municipality to determine your local recycling options.
- Energy-saving features such as auto shut-off and dimming included.
- Lower power consumption
- Mercury-free
- Potential LEED points. For more LEED information please visit <https://new.usgbc.org/leed-v41>.

### ABOUT INTERLINKING:

- The Tuck interlink process utilizes master control which means the first fixture in the string controls the power for all subsequent linked fixtures.
- A 40-watt power supply is required for interlinking.
- When connecting a string of Tuck fixtures, the total interlinked system wattage cannot exceed 36 watts. Refer to the chart at right for combinations of the maximum quantity per length.
- Do not interlink with any other fixture family.

12"	17"	31"	44"
6	0	0	0
5	1	0	0
4	2	0	0
4	0	1	0
3	2	0	0
3	1	1	0
3	0	1	0
3	0	0	1
2	3	0	0
2	2	1	0
2	0	2	0
2	0	0	1
1	4	0	0
1	2	1	0
1	1	0	1
0	4	0	0
0	3	1	0
0	2	0	1
0	1	2	0
0	1	1	1
0	0	3	0
0	0	0	2